


Technical Datasheet **PRO-Premium** Double-Action-Valve [0981P]

Please read carefully before use!

Overview

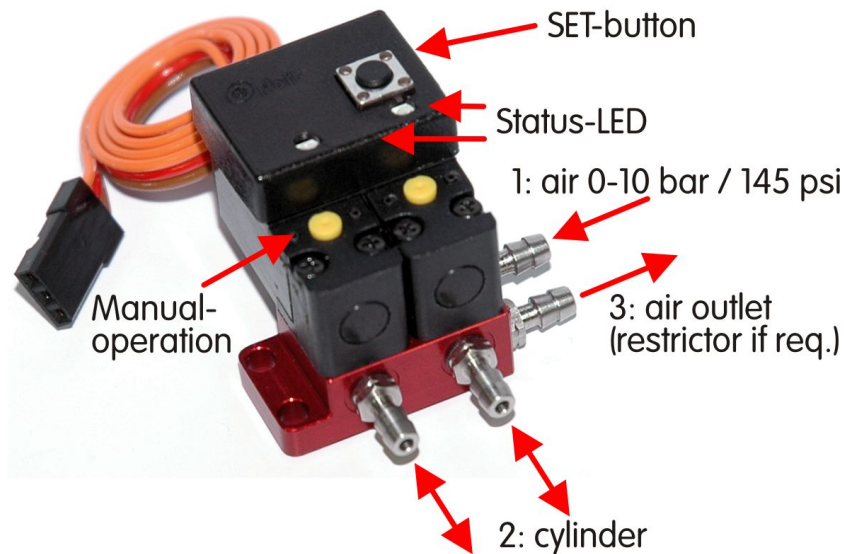

The **PRO-Premium Double-Action-Valve** is designed for compressed air cylinders **without** a return spring (e.g. Robart, BVM), where both the extension and retraction of the landig gear or flaps are powered by compressed air.

Factory setting

For the operation with doorsequencers like the Orbit Jetronic-BOX [0288], both valves are fix set to 100% R/C-travel way. All switching can be programmed at the Jetronic-Box directly. To leave the fixed mode and to make own settings, keep the **SET-button** pressed for 15 seconds while switching the R/C-system on.

Programming

- Pressing the **SET-button** for **1-2 seconds** teaches **valve-A ON** (1: => 2A:). The **status LED** confirms this with a flash.
- Pressing the **SET-button** for more than **5 seconds** teaches **valve-B ON** (1: => 2B:). The **status LED** confirms this with a flash.
- The **valves-A** and **-B** should now follow the control input from the R/C transmitter. The **status LED** indicates **valve ON** (1: => 2:) or **valve OFF** (3: <= 2:).
- To swap the **valve-A** and **-B** programming hold the **SET-button** pressed while turning on the R/C system. The **status LED** confirms the successful switchover.

Pressure range	0 to 10 bar / 145 psi 12 l/min
Weight	30 g (1oz) incl. lead
Connector	JR/UNI 4.8 – 6 V 1 mA / 100 mA
Dimensions (W x H x D):	40 x 32 x 30 mm (1.6" x 1.3" x 1.2")